




X-PAQ II

SD3500 SERIES

ANGLE

2.8Nm to 34Nm

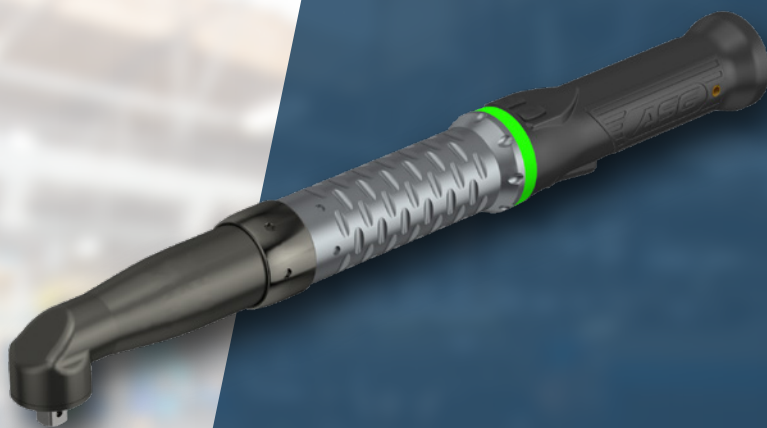

- **Compact, Optimized Angle Head:** Designed for tight access with durable spiral-cut gears for quieter, longer-lasting performance
- **Slim, Ergonomic Profile:** Textured grip ensures comfort and control in any position
- **High-Performance Brushless DC Motor:** Runs cooler, lasts longer, and delivers consistent power
- **Precision Torque Transducer + Angle Control:** Ensure exact torque and angle for superior accuracy in critical fastening applications
- **Configurable Operator Buttons:** Selectable functionality for a seamless operation
- **Ultra-Fast Digital Communication:** Instant, reliable data exchange between tool & controller
- **Durable, Low-Failure Cable Design:** Flexible, low-conductor-count connection minimizes wear points
- **Smart On-Board Memory:** Stores tool ID and usage data for traceability and process control
- **Multicolor LED Light Ring:** Customizable status indicators for instant visual feedback and workflow optimization
- **Adaptable Haptic Feedback:** Variable in-handle vibrations provide real-time operator alerts

CONFIGURATIONS:

3/8" Square Pin-Detent Standard

Ball Detent or Through Pinhole Available Upon Request

1/4" Hex Quick-Change Available for Certain Models Upon Request

Model Number	Driver Type	Torque Range		Length		Weight		Max RPM	Drive Size
		lb-ft	Nm	in	mm	lb	kg		
ASG-SD3500-34RP	Angle (90°)	5.0 - 25.1	6.8 - 34	15.7	400	3.1	1.4	650	3/8" Sq.
ASG-SD3500-25RP	Angle (90°)	3.7 - 18.4	5.0 - 25	16	407	2.9	1.3	800	3/8" Sq.
ASG-SD3500-24RP	Angle (90°)	3.5 - 17.7	4.8 - 24	15.7	400	3.1	1.4	950	3/8" Sq.
ASG-SD3500-20RP	Angle (90°)	2.9 - 14.7	4.0 - 20	16	407	2.9	1.3	1100	3/8" Sq.
ASG-SD3500-16RP	Angle (90°)	2.4 - 11.8	3.2 - 16	15.7	400	3.1	1.4	1350	3/8" Sq.
ASG-SD3500-14RP	Angle (90°)	2.1 - 10.3	2.8 - 14	16	407	2.9	1.3	1600	3/8" Sq.

REQUEST A QUOTE

ASG-JERGENS.COM/PF | asginfo@asg-jergens.com

