




X-PAQ II

SD3500 SERIES

INLINE

2Nm to 20Nm Range

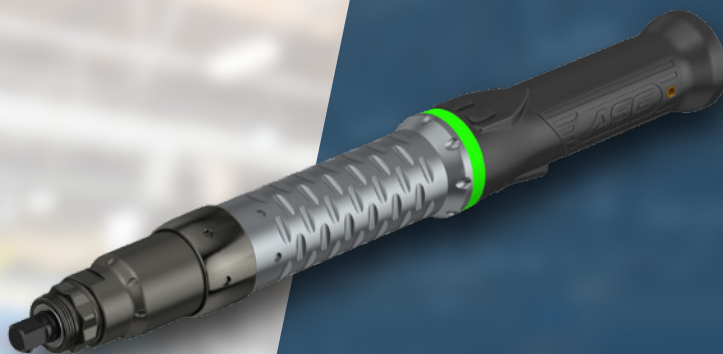

- **Slim, Ergonomic Profile:** Textured grip ensures comfort and control in any position
- **High-Performance Brushless DC Motor:** Runs cooler, lasts longer, and delivers consistent power
- **Precision Torque Transducer + Angle Control:** Ensure exact torque and angle for superior accuracy in critical fastening applications
- **Configurable Operator Buttons:** Selectable functionality for a seamless operation
- **Ultra-Fast Digital Communication:** Instant, reliable data exchange between tool & controller
- **Durable, Low-Failure Cable Design:** Flexible, low-conductor-count connection minimizes wear points
- **Smart On-Board Memory:** Stores tool ID and usage data for traceability and process control
- **Multicolor LED Light Ring:** Customizable status indicators for instant visual feedback and workflow optimization
- **Adaptable Haptic Feedback:** Variable in-handle vibrations provide real-time operator alerts

CONFIGURATIONS:

3/8" Square Pin-Detent Standard

Ball Detent or Through Pinhole Available Upon Request

1/4" Hex Quick-Change Available for Certain Models Upon Request

Model Number	Driver Type	Torque Range		Length		Weight		Max RPM	Drive Size
		lb-ft	Nm	in	mm	lb	kg		
ASG-SD3500-20LP	Inline (straight)	2.8 - 14.7	4.0 - 20	14.6	370	2.3	1.0	1100	3/8" Sq.
ASG-SD3500-15LP	Inline (straight)	2.2 - 11.1	3.0 - 15	14.6	370	2.3	1.0	1600	3/8" Sq.
ASG-SD3500-10LP	Inline (straight)	1.4 - 7.4	2.0 - 10	14.6	370	2.3	1.0	2300	3/8" Sq.

REQUEST A QUOTE

ASG-JERGENS.COM/PF | asginfo@asg-jergens.com

