




X-PAQ II

SD4500 SERIES

ANGLE

6Nm to 60Nm Range

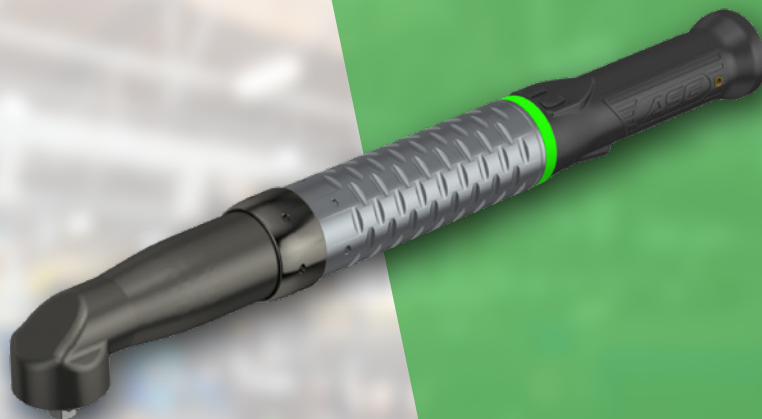

- **Compact, Optimized Angle Head:** Designed for tight access with durable spiral-cut gears for quieter, longer-lasting performance
- **Slim, Ergonomic Profile:** Textured grip ensures comfort and control in any position
- **High-Performance Brushless DC Motor:** Runs cooler, lasts longer, and delivers consistent power
- **Precision Torque Transducer + Angle Control:** Ensure exact torque and angle for superior accuracy in critical fastening applications
- **Configurable Operator Buttons:** Selectable functionality for a seamless operation
- **Ultra-Fast Digital Communication:** Instant, reliable data exchange between tool & controller
- **Durable, Low-Failure Cable Design:** Flexible, low-conductor-count connection minimizes wear points
- **Smart On-Board Memory:** Stores tool ID and usage data for traceability and process control
- **Multicolor LED Light Ring:** Customizable status indicators for instant visual feedback and workflow optimization
- **Adaptable Haptic Feedback:** Variable in-handle vibrations provide real-time operator alerts

CONFIGURATIONS:

3/8" Square Pin-Detent Standard
Ball Detent or Through Pinhole Available Upon Request

Model Number	Driver Type	Torque Range		Length		Weight		Max RPM	Drive Size
		lb-ft	Nm	in	mm	lb	kg		
ASG-SD4500-60RP	Angle (90°)	8.8 - 44.2	12 - 60.0	17.5	444	4.55	2.1	750	3/8" Sq.
ASG-SD4500-40RP	Angle (90°)	5.9 - 29.5	8.0 - 40	17.5	444	4.55	2.1	1100	3/8" Sq.
ASG-SD4500-30RP	Angle (90°)	4.4 - 22.1	6.0 - 30	17.5	444	4.55	2.1	1600	3/8" Sq.

REQUEST A QUOTE

ASG-JERGENS.COM/PF | asginfo@asg-jergens.com

