



# BTL-5A Switching Power Supply



## User Manual



BTL-5A switching power supply is designed for ASG BTL-05, BTL-10, and BTL-15 electric screwdrivers. The power supply is characterized by stable performance, strong power, extreme safety and easy maintenance.

## Instructions

- BTL-5A switching power supply is applied to ASG BTL-05, BTL-10, and BTL-15 electric screwdrivers only
- Please notice whether the electric screwdriver connects to the power supply with 5P connecting wire in correct orientation
- Insures that the power supply is connected at 90-240V 50/60Hz, and turn on the power. When the LED red light illuminates, the machine is ready to work
- User can change the output voltage to LOW: 25V or HI: 30V by turning the HI/LOW switch, to convert the speed of the electric screwdriver

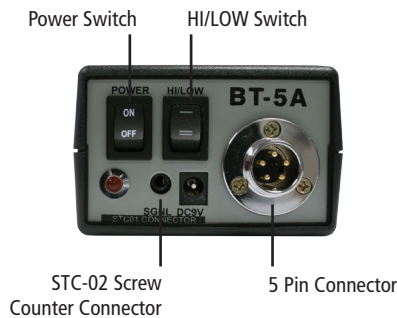

## Features

Model	BTL-5A	
ASG Number	65710	
Input Voltage AC	AC 90-240V	50/60 Hz
Output Voltage DC	DC 25V/30V/9V — LOW/HI 2 Level to Switch	
Output Amp	DC 5.0A — (MAX)	
Size WxDxH	3.41 in. x 6.61 in. x 2.19 in	
Weight	1.46 lb.	
Cord Length	5.9 ft. (with ground wire)	
Compatible Screwdrivers	ASG BTL-05, BTL-10, BTL-15	

## Caution

- The product is designed for indoor use only. Do not use product in an outdoor or humid environment, or near combustible gas, liquid or powder to avoid danger
- The plug must match up with the socket. Please do not modify the plug in any form. Any kind of adapter for the power source with ground wire is forbidden
- Non-professionals should not disassemble the product to avoid accidents

ASG, Division of Jergens, Inc.

15700 S. Waterloo Road | Cleveland, OH 44110-3898

Phone: (888) 486-6163 | Fax: (216) 481-4519

Email: [asginfo@asg-jergens.com](mailto:asginfo@asg-jergens.com) | Web: [www.asg-jergens.com](http://www.asg-jergens.com)

© 2015 Jergens, Inc. All Rights Reserved | Revision Date: 2/2/2016

Page 1 of 1