



# TW Series Digital Torque Wrenches User Manual

## **ASG, Division of Jergens, Inc.**

15700 S. Waterloo Road | Cleveland, OH 44110-3898  
Phone: (888) 486-6163 | Fax: (216) 481-4519  
Email: [asginfo@asg-jergens.com](mailto:asginfo@asg-jergens.com) | Web: [www.asg-jergens.com](http://www.asg-jergens.com)



# TW Series Digital Torque Wrenches

## User Manual

### Table of Contents

Basic Description and Guidelines .....	3
Recommended Use .....	3
General Characteristics .....	3
Changing the Batteries .....	3
Ratchet Head Guidelines.....	4
Guidelines .....	4
Calibration .....	4
Modes of Operation .....	5
Language Mode .....	5
Unit Mode.....	6
Date Mode .....	6
Track Mode .....	6
Peak Mode .....	7
Set Mode.....	8
Pre-Set Mode .....	9
Recall Mode .....	9
Upload Mode .....	10
Comms Mode.....	10
Clear Mode .....	11



# TW Series Digital Torque Wrenches

## User Manual

## Basic Description and Guidelines

The TW Series Digital Torque Wrench is a state of the art hand-held device suitable for both torque auditing and torque application. As a precision tool, it is highly accurate as well as highly repeatable. For product portfolio cohesion, the wrench uses the same organic LED display, membrane keypad, user interface and PC based data management software as other standard products within this range of electronic torque tools. Additionally, training time is kept to a minimum due to the ease of use of the tool itself.

Our products are demonstrated to have an accuracy of 1% or better, and are both simple to set and calibrate as well as coming with a fully traceable ISO 6789-2003 Certification.

The TW Series Digital Torque Wrench has both visual and audible alarms that signal good or bad torque. Furthermore, there is a visual battery life indicator, alarms for preset value approach, fastener overload, range overload and maximum mechanical overload.

## Recommended Use

The TW Series Digital Torque Wrench is specifically designed for use in industrial settings and applications where high accuracy and repeatability combined with a complete torque data management and control system are required.

## General Characteristics

Accuracy	Right hand side torque = 1% of actual reading, Left hand side torque = 1% of actual reading
Resolution	0.01 to 50 N.m 0.1 to 1000 N.m
Alarms	Pre-Set Value Approach, Range Overload, Mechanical Overload, Low Battery, Memory Full
Memory Capacity	5000+ Values

## Changing the Batteries

1. Unscrew the metal end cap at the opposite end of the wrench to the ratchet head
2. Remove the four AA cell batteries and replace with a new set
3. Screw back on the metal end cap
4. Turn on the wrench and check to ensure the date and time are both set correctly



# TW Series Digital Torque Wrenches

## User Manual

### | Basic Description and Guidelines

#### Ratchet Head Guidelines

- Store in a cool, dry location
- Oil frequently to prevent ratchet head from becoming stiff and seizing
- Do not exceed specified torques
- Do not use external forces on ratchet (i.e. a hammer)
- Max Torques: 1/4" = 30 N.m, 3/8" = 135 N.m, 1/2" = 340 N.m

#### Guidelines

The following are a set of general guidelines for using and storing the wrench that should be adhered to at all times.

- All torque tools are precision instruments and should be handled with care
- Do not subject the tool to torque loads in excess of the model range
- Do not use the tool to loosen fasteners tightened beyond maximum tool capacity
- Using non-linear extensions may affect the accuracy of the readings
- The use of torque extensions will increase the torque applied
- Do not operate the tool unless it has been powered on and the display screen can be read clearly
- Do not drop the tool or subject it to heavy impact blows
- Ensure the tool is stored in a cool, dry location to protect from damage
- Adhere to safety instructions
- Torque should be applied to the center of the torque wrench handle as torque is length dependent
- Ensure safe footing and safe force application

#### Calibration

For calibration instructions please contact ASG.



# TW Series Digital Torque Wrenches

## User Manual


### | Modes of Operation

Torque reading starts at 5% of maximum capacity with an accuracy of 1% beginning at 10% of maximum capacity (threshold to maximum span).

The following are the different modes available with the TW Series Digital Torque Wrench:

- Language Mode
- Unit Mode
- Date Mode
- Set Mode
- Pre-Set Mode
- Recall Mode
- Upload Mode
- Clear Mode
- Comms Mode

### Language Mode

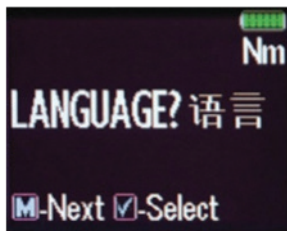

The languages of operation available to the user are: English, Chinese, French, German, Italian, Polish, Portuguese, Russian, Spanish

Step 1: Press **M** to scroll to the Language Menu

Step 2: Press **✓** to enter Language Menu

Step 3: Press **↑** **↓** to scroll to the language required

Step 4: Press **✓** to confirm operation in this language




# TW Series Digital Torque Wrenches

## User Manual

### Modes of Operation

#### Unit Mode – Keypad Function

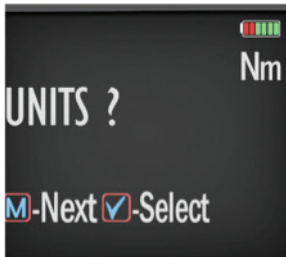

The following units of measurement are available: kgf.cm, kgf.m, cN.m, N.m, ozf.in, lbf.in, lbf.ft

Step 1: Press **M** to scroll to the Units Menu

Step 2: Press **✓** to enter Units Menu

Step 3: Press **↑** **↓** to scroll to the units required

Step 4: Press **✓** to confirm selected units

#### Date Mode – Keypad Function

Step 1: Press **M** to scroll to the Date Menu

Step 2: Press **✓** to enter Date Menu

Step 3: Press **↑** **↓** to scroll to set the minute and hour

Step 4: Press **✓** to confirm

Step 4: Repeat steps 3 and 4 to set the month, date and year

#### Track Mode



As torque is applied, the driver will actively display the applied torque reading from 5% up to the maximum span of the device. Upon removal of the load, the display will return to zero.

Step 1: Press **M** to scroll to Track Mode

Step 2: Press **✓** to operate in Track Mode




# TW Series Digital Torque Wrenches

## User Manual

### | Modes of Operation

#### Peak Mode

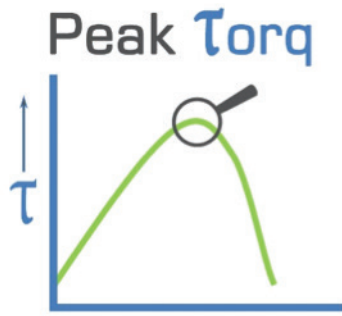

In Peak mode, the maximum torque reading will remain on the OLED display when the load is removed as long as the torque loaded is above the 10% of maximum capacity threshold. The user has the option to store the reading in memory. If storage of the reading is not required, the user may continue to the next measuring task.

Step 1: Press **M** to scroll to Peak Mode

Step 2: Press **✓** to operate in Peak Mode

Step 3: Press **✓** to store the peak value if required



# TW Series Digital Torque Wrenches

## User Manual

### | Modes of Operation

#### Set Mode

This mode allows the user to set limits for the torque applied or measured. The operator can choose to set torque values by % or tolerance. During operation the OLED display will be green when approaching the pre-set tolerance and will change to red if exceeded.

Step 1: Press **M** to scroll to Set Mode

Step 2: Press **✓** to select Set Mode

Step 3: Press **↑** **↓** to scroll to set by % or set by tolerance



Step 4: Press **↑** **↓** to scroll to required pre-set number (i.e. 1 to 99)

Step 5: Press **✓** to confirm pre-set number selected

Step 6: Press **↑** **↓** to set nominal value and **✓** to confirm

Step 7: Press **↑** **↓** to set your low value and **✓** to confirm

Step 8: Press **↑** **↓** to set your high value and **✓** to confirm

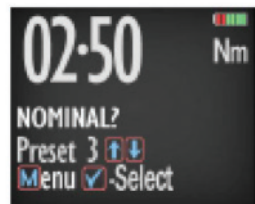

Step 9: Once the parameters have been confirmed the operator can find the task within Pre-Set Mode. Use **M** to select Pre-Set Mode from the main menu to find the task.








# TW Series Digital Torque Wrenches

## User Manual

### Modes of Operation

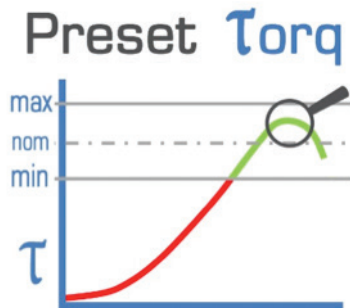

### Pre-Set Mode

In Pre-Set mode, the maximum torque reading will remain on the OLED display when the load is removed as long as the torque loaded is above the 10% of maximum capacity threshold.

- **Passing Minimum Value:** the green LED on the keypad will flash and the buzzer will sound intermittently. The OLED display will change to orange
- **Passing Nominal Value:** the green LED on the keypad will switch on and the buzzer will sound continuously. The OLED display change to green
- **Passing Maximum Value:** The red LED will flash continuously and the buzzer will sound continuously and the OLED will change to red

Step 1: Press **M** to scroll to Pre-Set Mode

Step 2: Press **✓** to enter Pre-Set Mode

Step 3: Press **↑** **↓** to select your preferred pre-set number (i.e. 1 to 99)

Step 4: Press **✓** to operate within this pre-set parameter

Step 5: Press **✓** to store the applied torque if required

### Recall Mode

This mode allows the user to view the stored torque and angle data. Only locations containing data will be displayed. Note that as data is stored, the locations are populated sequentially from 01.

Step 1: Press **M** to scroll to Recall Mode

Step 2: Press **✓** to enter and view memory locations, results and functions

Step 3: Press **↑** **↓** to scroll through locations that contain data



# TW Series Digital Torque Wrenches

## User Manual

### | Modes of Operation

#### Upload Mode

This mode allows the user to upload stored torque data. In upload mode, the driver must be connected to a PC running the PC Front-End Software (PCFE) via the USB port on the Driver and the PC.


Step 1: Press  to scroll to Upload Mode

Step 2: Press  to enter Upload Mode

Step 3: Press  to select "From" and   for end location to be uploaded


Step 4: Press  to confirm "From" location


Step 5: Press  to select "To" and   for end location to be uploaded

Step 6: Press  to confirm. You are asked if you are sure, press  to confirm

#### Comms Mode

This mode allows the user to select the method of communication. The standard model allows communication by standard USB cable to the included software. For communication by ASCII or BINARY, the wrench will need physical modifications in advance.

Step 1: Press  to scroll to Comms Mode

Step 2: Press  to enter Comms Mode

Step 3: Press   to select the method of communication and  to confirm

**Note:** For standard communication to the included software program, select 'PCFE'




# TW Series Digital Torque Wrenches

## User Manual

### | Modes of Operation

#### Clear Mode


This mode allows the user to clear the stored data from an individual range of locations. Before clearing the selected range and as a safety precaution, the user will be asked are they sure they wish to clear selected data. This can be done by pressing the confirm button.


Step 1: Press  to scroll to Clear Mode

Step 2: Press  to enter Clear Mode

Step 3: Press   to select "From" range to be cleared and press  to confirm

Step 4: Press   to select "To" range to be cleared and press  to confirm

Step 5: Press  to confirm and you will be asked if you are sure

Step 6: Press  to confirm and that the range of the data is cleared from the wrench memory